



Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- 1/4" compression inlet
- Max flow rate: 1.8 gpm (6.8 L/min)
- Ceramic disc cartridge
- **Not** compatible with RO filter units

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant




9620-K50-ST-SN shown

9620-K50-RB-SN shown

XX = Denotes handle style



Handle Style	A	B
ST BST	4-1/4" [108]	2-1/2" [63]
RB BRB	4-1/4" [108]	2-1/2" [64]

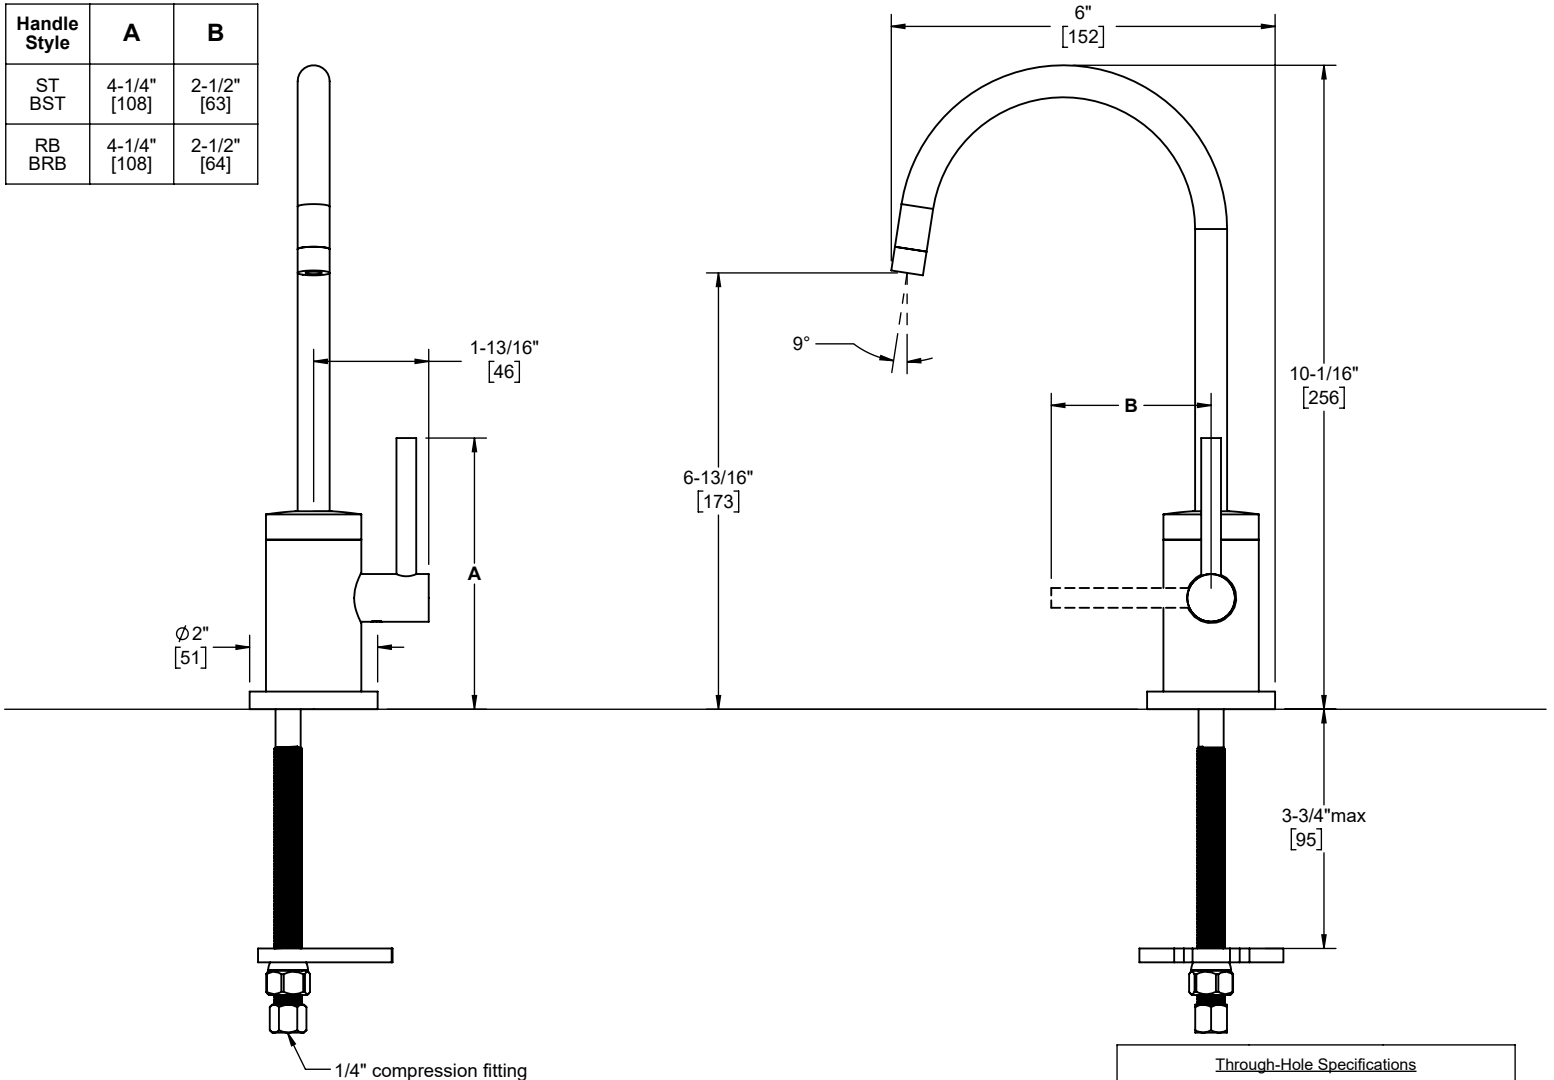

Through-Hole Specifications		
Min	Recommended	Max
Ø 1/2" [13]	Ø 1" [25]	Ø 1-1/2" [38]